



## Company profile 公司简介

### About us

Longse Electronics Limited is one of the leading CCTV Cameras and DVRs' manufactures with considerable technology and scale in China. Our products have passed many international certifications such as CE, FCC, RoHS, also are sold in over 150 countries with high reputation. Cooperation Clients reach more than 2,000.

### Our R&D

Strong R&D department is essential for Longse to innovate and stride for excellence! Each year we invest 10% of our sales income to research and development. Longse keep release two kinds of cameras every month. All of these bring us in the leading place in the industry and guarantees excellent performance of our products.

### Market Strategy

Oriented to the market requirements and keeping win-win cooperation as our guidance, Longse is continuously devoted to seeking market expansion and promotion, developing overseas customers, enhancing brand credit and reputation. Sharing the better products, service and interests, Longse and our cooperators will grow and get stronger together.

### Service System

Perfect service system and deep service consciousness are our guarantee to meet the customers' demands. Longse has a 45 person after sales team. The qualified and experienced service experts provide the quickest and best services to you. Longse also provides service with customized features and offers professional security and surveillance system solutions to meet various customers' demands.

Choose Longse, Choose professional!

广州长视电子有限公司创建于2003年，是一家集研发、生产、销售为一体的高新科技企业。主要致力于研发、生产高品质的安防监控产品，是目前中国大陆最好的监控设备生产厂家之一。产品范围涵盖了红外防水摄像机，半球摄像机，枪型摄像机，网络摄像机，高速球摄像机，数字硬盘录像机及CCTV镜头、支架、护罩等周边产品。

我们有很强的研发能力。极具经验的外籍工程师能准确地把握包括稳定的电路方案、元件的选择、检测和装配的标准等多样技术，从而达到高生产效率和高产品质量。产品通过了CE、FCC、RoHS等国际认证。

我们有很强的生产能力。公司工厂面积五千多平方米，职员已超过500人，四条全新的SMT生产线，十二条监控摄像机整机装配流水线，产品有完善的工艺、检测、老化等手段作为质量保证，生产流程严格施行全面质量管理体系。公司采用了高科技设施，如：无尘间、暗房（模拟户外的环境无光反射）；同时拥有先进的测试设备，如矢量示波器、标准灯箱、进口高分辨率监视器、恒温烘烤箱、光谱仪、光学成像投影机、高低温测试仪、振动试验台等，为生产高质量产品提供有力保障。

我们不断推出符合国内外市场需要的优质产品，保持与我们的客户长期良好的合作关系，保证客户的利益，满足客户的特殊要求。我们十分注重聆听客户的建议，不断投入研发和管理，有着良好的信誉和完善的售后服务。结合熟练的工人，严格的管理和先进技术，我们以极具竞争力的价格向世界各地提供高品质的CCTV产品！

我们以优质的服务和高品质产品在安防监控行业和客户群体中赢得了很高的信誉。产品已销往欧洲、北美、南美、中东、东南亚、澳洲等国际市场，且与来自世界各国的众多分销商建立起长期的代理和OEM合作关系。产品以高科技含量、品种多样化、质优价优的优势，深得国内外客户的一致好评。

# CONTENTS

## 目录

WEATHERPROOF IR CAMERA 红外防水摄像机	01
IR ILLUMINATOR 红外照明灯	13
SPEED DOME CAMERA 云台半球摄像机	15
DOME CAMERA 半球摄像机	19
MINIATURE CAMERA 微型摄像机	27
SPY CAMERA 隐型摄像机	29
IP CAMERA 网络摄像机	31
BOX CAMERA 枪型摄像机	33
DIGITAL VIDEO RECORDER 数字硬盘录像机	34
CCTV CAMERA & DVR KIT 摄像机&硬盘录像机套装	40

More products information at: [www.longse.com](http://www.longse.com)

**longse**<sup>®</sup>

# WEATHERPROOF IR CAMERA

红外防水摄像机



Whatever the weather is,  
Here is still a Clear World for you

无论阴晴雨雪，  
这里仍给你一片清晰世界



## LIXT40


### Product Features:

- Weatherproof IR Camera with Varifocal Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- IR-Cut Function is optional
- $\phi$  5mmx36PCS IR LEDs, 30m IR range
- 4-9mm Manual Zoom Lens with external adjustment
- 2.8-10mm Manual Zoom Lens is optional
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水手动变焦镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- IR-Cut功能可选
- 36颗 $\phi$  5mm红外灯, 红外夜视距离30米
- 标配4-9mm手动变焦镜头, 可外部调焦
- 2.8-10mm 手动变焦镜头可选
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	1.3KG	690x390x535mm	16pcs/ctn



## LIXT90


### Product Features:

- Weatherproof IR Camera with Varifocal Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- IR-Cut Function is optional
- Double Votalge AC24/DC12 is optional
- $\phi$  8mmx36PCS IR LEDs, 50m IR range
- 4-9mm Manual Zoom Lens with external adjustment
- 2.8-10mm Manual Zoom Lens is optional
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水手动变焦镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- IR-Cut功能可选
- AC24/DC12V双电压可选
- 36颗 $\phi$  8mm红外灯, 红外夜视距离50米
- 标配4-9mm手动变焦镜头, 可外部调焦
- 2.8-10mm 手动变焦镜头可选
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	1.5KG	690x390x535mm	16pcs/ctn



## LIXTX90


### Product Features:

- Weatherproof IR Camera with Dynamic Varifocal Lens
- Sony CCD
- 420/600/700TVL is optional
- $\phi$  8mmx36PCS IR LEDs, 50m IR range
- 4-9mm Dynamic Varifocal Lens (standard)
- 5-15mm Dynamic Varifocal Lens (optional)
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水变焦镜头摄像机
- Sony CCD
- 420/600/700TVL可选
- 36颗 $\phi$  8mm红外灯, 红外夜视距离50米
- 标配4-9mm自动变焦镜头
- 可选配5-15mm自动变焦镜头
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	1.5KG	690x390x535mm	16pcs/ctn

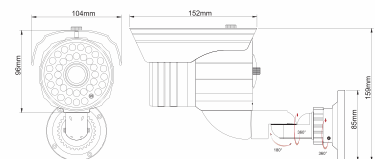

## LICE24N

### Product Features:

- Weatherproof IR Camera with Fixed Lens
- Sony/Sharp CCD is optional
- 420/540/600TVL is optional
- $\phi$  5mmx24PCS IR LEDs, 20m IR range
- Standard match with 3.6mm/F2.0 Board Lens
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水固定镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600TVL可选
- 24颗 $\phi$  5mm红外灯, 红外夜视距离20米
- 标配3.6mm固定板机镜头
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.7KG	515x390x370mm	42pcs/ctn

## LICE24

### Product Features:

- Weatherproof IR Camera with Fixed Lens
- Sony/Sharp CCD is optional
- 420/540/600TVL is optional
- $\phi$  5mmx24PCS IR LEDs, 20m IR range
- Standard match with 3.6mm/F2.0 Board Lens
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水固定镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600TVL可选
- 24颗 $\phi$  5mm红外灯, 红外夜视距离20米
- 标配3.6mm固定板机镜头
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.7KG	515x390x370mm	24pcs/ctn

## LICE36

### Product Features:

- Weatherproof IR Camera with Fixed Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  5mmx36PCS IR LEDs, 30m IR range
- Standard match with 6mm/F2.0 Board Lens
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水固定镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 36颗 $\phi$  5mm红外灯, 红外夜视距离30米
- 标配6mm固定板机镜头
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.9KG	515x390x370mm	42pcs/ctn



## LICE48

### Product Features:

- Weatherproof IR Camera with Fixed Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  5mmx48PCS IR LEDs, 40m IR range
- Standard match with 8mm/F2.0 Board Lens
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水固定镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 48颗 $\phi$  5mm红外灯, 红外夜视距离40米
- 标配8mm固定板机镜头
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.9KG	515x390x370mm	42pcs/ctn



## LICE48B

### Product Features:

- Weatherproof IR Camera with Fixed Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  5mmx48PCS IR LEDs, 40m IR range
- Standard match with 8mm/F2.0 Board Lens
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水固定镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 48颗 $\phi$  5mm红外灯, 红外夜视距离40米
- 标配8mm固定板机镜头
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/黑色/white/black	DC12V	1KG	355x315x385mm	16pcs/ctn





## LICG24

### Product Features:

- Weatherproof IR Camera with Fixed Lens
- Sony/Sharp CCD is optional
- 420/540/600 is optional
- $\phi$  5mmx24PCS IR LEDs, 20m IR range
- Standard match with 3.6mm/F2.0 Board Lens
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水固定镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600TVL可选
- 24颗  $\phi$  5mm红外灯, 红外夜视距离20米
- 标配3.6mm固定板机镜头
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
韩国色/dark-gray color	DC12V	0.9KG	675x335x263mm	36pcs/ctn



## LICG36

### Product Features:

- Weatherproof IR Camera with Fixed Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  5mmx36PCS IR LEDs, 30m IR range
- Standard match with 6mm/F2.0 CS Lens
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水固定镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 36颗  $\phi$  5mm红外灯, 红外夜视距离30米
- 标配6mm固定CS镜头
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
韩国色/dark-gray color	DC12V	1KG	675x335x263mm	36pcs/ctn




## LICG40

### Product Features:

- Weatherproof IR Camera with Varifocal Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  5mmx36PCS IR LEDs, 30m IR range
- 4-9mm Manual Zoom Lens with external adjustment
- 2.8-10mm Manual Zoom Lens is optional
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水手动变焦镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 36颗  $\phi$  5mm红外灯, 红外夜视距离30米
- 标配4-9mm手动变焦镜头, 可外部调焦
- 2.8-10mm 手动变焦镜头可选
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
韩国色/dark-gray color	DC12V	1.2KG	675x335x263mm	36pcs/ctn



## LICG90

### Product Features:

- Weatherproof IR Camera with Varifocal Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  8mmx36PCS IR LEDs, 50m IR range
- 4-9mm Manual Zoom Lens with external adjustment
- 2.8-10mm Manual Zoom Lens is optional
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水手动变焦镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 36颗  $\phi$  8mm红外灯, 红外夜视距离50米
- 标配4-9mm手动变焦镜头, 可外部调焦
- 2.8-10mm 手动变焦镜头可选
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
韩国色/dark-gray color	DC12V	1.4KG	675x335x263mm	36pcs/ctn


## LIA40D

### Product Features:

- Weatherproof IR Camera with Varifocal Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Double Votalge AC24/DC12 is optional
- $\phi$  5mmx42PCS IR LEDs, 40m IR range
- 4-9mm Manual Zoom Lens with external adjustment
- 2.8-10mm Manual Zoom Lens is optional
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水手动变焦镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- AC24/DC12V双电压可选
- 42颗  $\phi$  5mm红外灯, 红外夜视距离40米
- 标配4-9mm手动变焦镜头, 可外部调焦
- 2.8-10mm 手动变焦镜头可选
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷

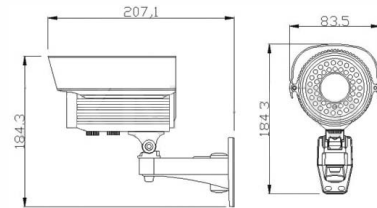

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
韩国色/dark-gray color	DC12V	1.6KG	520x510x480mm	16pcs/ctn


## LIA90D

### Product Features:

- Weatherproof IR Camera with Varifocal Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Double Votalge AC24/DC12 is optional
- $\phi$  5mmx72PCS IR LEDs, 60m IR range
- 4-9mm Manual Zoom Lens with external adjustment
- 2.8-10mm Manual Zoom Lens is optional
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水手动变焦镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- AC24/DC12V双电压可选
- 72颗  $\phi$  5mm红外灯, 红外夜视距离60米
- 标配4-9mm手动变焦镜头, 可外部调焦
- 2.8-10mm 手动变焦镜头可选
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
韩国色/dark-gray color	DC12V	1.6KG	520x510x480mm	16pcs/ctn






## LIED30

### Product Features:

- Weatherproof IR Camera with Fixed Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  5mmx30PCS IR LEDs, 25m IR range
- Standard match with 3.6mm/F2.0 Board Lens
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水固定镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 30颗 $\phi$ 5mm红外灯, 红外夜视距离25米
- 标配3.6mm固定板机镜头
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
韩国色/dark-gray color	DC12V	0.7KG	675x335x263mm	36pcs/ctn


## LIED40

### Product Features:

- Weatherproof IR Camera with Varifocal Lens
- Sony CCD
- 420/540/600/700TVL is optional
- $\phi$  5mmx42PCS IR LEDs, 40m IR range
- 4-9mm Manual Zoom Lens with external adjustment
- 2.8-10mm Manual Zoom Lens is optional
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水手动变焦镜头摄像机
- Sony CCD
- 420/540/600/700TVL可选
- 42颗 $\phi$ 5mm红外灯, 红外夜视距离40米
- 标配4-9mm手动变焦镜头, 可外部调焦
- 2.8-10mm 手动变焦镜头可选
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
韩国色/dark-gray color	DC12V	1.3KG	355x315x385mm	16pcs/ctn




## LIED50

### Product Features:

- Weatherproof IR Camera with Varifocal Lens
- Sony CCD
- 420/540/600/700TVL is optional
- $\phi$  5mmx65PCS IR LEDs, 50m IR range
- 2.8-12mm Manual Zoom Lens with external adjustment
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水手动变焦镜头摄像机
- Sony CCD
- 420/540/600TVL可选
- 65颗 $\phi$ 5mm红外灯, 红外夜视距离50米
- 标配2.8-12mm手动变焦镜头, 可外部调焦
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
韩国色/dark-gray color	DC12V	1.6KG	395x375x382mm	12pcs/ctn

## LIEDX50

### Product Features:

- Weatherproof IR Camera with Dynamic Varifocal Lens
- Sony CCD
- 420/600/700TVL is optional
- $\phi$  5mmx65PCS IR LEDs, 50m IR range
- 4-9mm Dynamic Varifocal Lens (standard)
- 5-15mm Dynamic Varifocal Lens (optional)
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水自动变焦镜头摄像机
- Sony CCD
- 420/600/700TVL可选
- 65颗 $\phi$ 5mm红外灯, 红外夜视距离50米
- 标配4-9mm自动变焦镜头
- 可选5-15mm自动变焦镜头
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
韩国色/dark-gray color	DC12V	1.6KG	395x375x382mm	12pcs/ctn




## LIK24

### Product Features:

- Weatherproof IR Camera with Fixed Lens
- Sony/Sharp CCD is optional
- 420/540/600 is optional
- $\phi$  5mmx24PCS IR LEDs, 20m IR range
- Standard match with 3.6mm/F2.0 Board Lens
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水固定镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600TVL可选
- 24颗  $\phi$  5mm红外灯, 红外夜视距离20米
- 标配3.6mm固定板机镜头
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
黑色/black	DC12V	0.9KG	675x335x263mm	36pcs/ctn




## LIK40

### Product Features:

- Weatherproof IR Camera with Fixed Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  5mmx42PCS IR LEDs, 40m IR range
- Standard match with 6mm/F2.0 CS Lens
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水固定镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 42颗  $\phi$  5mm红外灯, 红外夜视距离40米
- 标配6mm固定CS镜头
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
黑色/black	DC12V	1.2KG	355x315x385mm	16pcs/ctn




## LIKT40

### Product Features:

- Weatherproof IR Camera with Varifocal Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  5mmx42PCS IR LEDs, 40m IR range
- 4-9mm Manual Zoom Lens with external adjustment
- 2.8-10mm Manual Zoom Lens is optional
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水手动变焦镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 42颗  $\phi$  5mm红外灯, 红外夜视距离40米
- 标配4-9mm手动变焦镜头, 可外部调焦
- 2.8-10mm 手动变焦镜头可选
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	1.2KG	355x315x385mm	16pcs/ctn



## LIKT90

### Product Features:

- Weatherproof IR Camera with Varifocal Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  5mmx72PCS IR LEDs, 60m IR range
- 4-9mm Manual Zoom Lens with external adjustment
- 2.8-10mm Manual Zoom Lens is optional
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水变焦镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 72颗  $\phi$  5mm红外灯, 红外夜视距离60米
- 标配4-9mm手动变焦镜头, 可外部调焦
- 2.8-10mm 手动变焦镜头可选
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	1.4KG	395x375x382mm	12pcs/ctn




## LISN24

### Product Features:

- Weatherproof IR Camera with Fixed Lens
- Sony/Sharp CCD is optional
- 420/540/600 is optional
- $\phi$  5mmx24PCS IR LEDs, 20m IR range
- Standard match with 3.6mm/F2.0 Board Lens
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水固定镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600TVL可选
- 24颗 $\phi$  5mm红外灯, 红外夜视距离20米
- 标配3.6mm固定板机镜头
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.65KG	515x390x370mm	25pcs/ctn


## LISN30

### Product Features:

- Weatherproof IR Camera with Varifocal Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  5mmx30PCS IR LEDs, 25m IR range
- Standard match with 3.6mm/F2.0 Board Lens
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水固定镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 30颗 $\phi$  5mm红外灯, 红外夜视距离25米
- 标配3.6mm固定板机镜头
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.7 KG	515x390x370mm	25pcs/ctn




## LIE30

### Product Features:

- Weatherproof IR Camera with Fixed Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  5mmx30PCS IR LEDs, 25m IR range
- Standard match with 3.6mm/F2.0 Board Lens
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水固定镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 30颗 $\phi$  5mm红外灯, 红外夜视距离25米
- 标配3.6mm固定板机镜头
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
韩国色/dark-gray color	DC12V	0.7KG	675x335x263mm	36pcs/ctn


## LIE40

### Product Features:

- Weatherproof IR Camera with Varifocal Lens
- Sony CCD
- 420/540/600/700TVL is optional
- $\phi$  5mmx42PCS IR LEDs, 40m IR range
- 4-9mm Manual Zoom Lens with external adjustment
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水手动变焦镜头摄像机
- Sony CCD
- 420/540/600/700TVL可选
- 42颗 $\phi$  5mm红外灯, 红外夜视距离40米
- 标配4-9mm手动变焦镜头, 可外部调焦
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
韩国色/dark-gray color	DC12V	1.3KG	355x315x385mm	16pcs/ctn

# Weatherproof IR Camera 红外防水摄像机




## LIA40E

### Product Features:

- Weatherproof IR Camera with Varifocal Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Double Voltage AC24/DC12 is optional
- φ 5mmx42PCS IR LEDs, 40m IR range
- 4-9mm Manual Zoom Lens with external adjustment
- 2.8-10mm Manual Zoom Lens is optional
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水手动变焦镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- AC24/DC12V双电压可选
- 42颗 φ 5mm红外灯, 红外夜视距离40米
- 标配4-9mm手动变焦镜头, 可外部调焦
- 2.8-10mm 手动变焦镜头可选
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
韩国色/dark-gray color	DC12V	1.3KG	520x510x480mm	16pcs/ctn


## LIA90E

### Product Features:

- Weatherproof IR Camera with Varifocal Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Double Voltage AC24/DC12 is optional
- φ 5mmx72PCS IR LEDs, 60m IR range
- 4-9mm Manual Zoom Lens with external adjustment
- 2.8-10mm Manual Zoom Lens is optional
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水手动变焦镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- AC24/DC12V双电压可选
- 72颗 φ 5mm红外灯, 红外夜视距离60米
- 标配4-9mm手动变焦镜头, 可外部调焦
- 2.8-10mm 手动变焦镜头可选
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
韩国色/dark-gray color	DC12V	1.5KG	520x510x480mm	16pcs/ctn




## LIT40E

### Product Features:

- Weatherproof IR Camera with Varifocal Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Double Voltage AC24/DC12 is optional
- φ 5mmx36PCS IR LEDs, 30m IR range
- 4-9mm Manual Zoom Lens with external adjustment
- 2.8-10mm Manual Zoom Lens is optional
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水手动变焦镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- AC24/DC12V双电压可选
- 36颗 φ 5mm红外灯, 红外夜视距离30米
- 标配4-9mm手动变焦镜头, 可外部调焦
- 2.8-10mm 手动变焦镜头可选
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
银色/silver	DC12V	1.3KG	520x500x470mm	16pcs/ctn


## LIT90E

### Product Features:

- Weatherproof IR Camera with Varifocal Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Double Voltage AC24/DC12 is optional
- φ 8mmx36PCS IR LEDs, 50m IR range
- 4-9mm Manual Zoom Lens with external adjustment
- 2.8-10mm Manual Zoom Lens is optional
- IP66 Weatherproof Rating suitable for outdoor use
- 3-Axis Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水手动变焦镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- AC24/DC12V双电压可选
- 36颗 φ 8mm红外灯, 红外夜视距离50米
- 标配4-9mm手动变焦镜头, 可外部调焦
- 2.8-10mm 手动变焦镜头可选
- 防水等级IP66, 适合室外安装
- 内出线3轴支架, 墙壁安装方便快捷



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
银色/silver	DC12V	1.5KG	520x500x470mm	16pcs/ctn

## LIC30


### Product Features:

- Weatherproof IR Camera with Fixed Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  5mmx30PCS IR LEDs, 25m IR range
- Standard match with 3.6mm/F2.0 Board Lens
- IP66 Weatherproof Rating suitable for outdoor use

### 产品特点:

- 红外防水固定镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 30颗 $\phi$  5mm红外灯, 红外夜视距离25米
- 标配3.6mm固定板机镜头
- 防水等级IP66, 适合室外安装

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.85KG	515x390x370mm	24pcs/ctn



## LIC48


### Product Features:

- Weatherproof IR Camera with Fixed Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  5mmx48PCS IR LEDs, 40m IR range
- Standard match with 6mm/F2.0 Board Lens
- IP66 Weatherproof Rating suitable for outdoor use

### 产品特点:

- 红外防水固定镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 48颗 $\phi$  5mm红外灯, 红外夜视距离40米
- 标配6mm固定板机镜头
- 防水等级IP66, 适合室外安装

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	1.1KG	515x390x370mm	24pcs/ctn



## LIC60


### Product Features:

- Weatherproof IR Camera with Varifocal Lens
- Sony CCD
- 420/540/600/700TVL is optional
- Build in Auto Temperature Control
- $\phi$  8mmx36PCS IR LEDs, 50m IR range
- 5-15mm Manual Zoom Lens with external adjustment
- IP66 Weatherproof Rating suitable for outdoor use
- Cable Built-in Bracket easy for wall installation

### 产品特点:

- 红外防水手动变焦镜头摄像机
- Sony CCD
- 420/540/600/700TVL可选
- 内置温控调节器
- 36颗 $\phi$  8mm红外灯, 红外夜视距离50米
- 标配5-15mm手动变焦镜头, 可外部调焦
- 防水等级IP66, 适合室外安装
- 内出线支架, 墙壁安装方便快捷

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
灰色/gray	DC12V	2.5KG	690x390x535mm	12pcs/ctn



## LIR60

### Product Features:

- Weatherproof IR Camera with Fixed Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  8mmx36PCS IR LEDs, 50m IR range
- Standard match with 8mm/F2.0 CS Lens
- IP66 Weatherproof Rating suitable for outdoor use

### 产品特点:

- 红外防水固定镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 36颗  $\phi$  8mm红外灯, 红外夜视距离50米
- 标配8mm固定CS镜头
- 防水等级IP66, 适合室外安装



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
银色/silve	DC12V	0.9KG	395x375x382mm	12pcs/ctn

## LIS48

### Product Features:

- Weatherproof IR Camera with Fixed Lens
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  5mmx48PCS IR LEDs, 40m IR range
- Standard match with 6mm/F2.0 Board Lens
- IP66 Weatherproof Rating suitable for outdoor use

### 产品特点:

- 红外防水固定镜头摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 48颗  $\phi$  5mm红外灯, 红外夜视距离40米
- 标配6mm固定板机镜头
- 防水等级IP66, 适合室外安装



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
深灰色/dark-gray	DC12V	0.9KG	355x315x385mm	16pcs/ctn

# IR ILLUMINATOR

红外照明灯


## LEDI80

### Product Features:

- Weatherproof IR Illuminator
- 114pcs  $\phi$  8-14  $\mu$  Strong Infrared LEDs
- 80m Effective IR Range
- IR LED Angle 45° /30° /15° is optional
- 12VDC Input Voltage, Max Power 16W
- IP66 Weatherproof Rating suitable for outdoor use

### 产品特点:

- 红外防水照明灯
- 采用114颗高功率红外灯
- 有效红外照射距离达80米
- 红外光角度45° /30° /15° 可选
- 12V直流电源供电，最大功率16瓦
- 防水等级IP66，适合室外安装

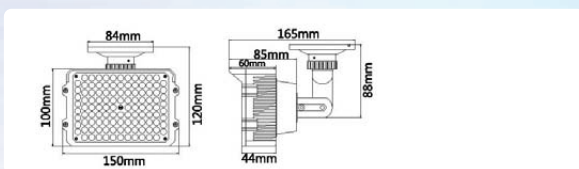

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
韩国色/dark-gray color	DC12V	1KG	675x335x263mm	36pcs/ctn




## LED M50

### Product Features:

- IR Dome Illuminator
- 42pcs  $\phi$  8-20  $\mu$  Wide Angle Strong Infrared LEDs
- 50 Square Meters Effective IR Range
- 180° IR LED Angle
- 12VDC Input Voltage, Max Power 20W
- Suitable for Indoor Use

### 产品特点:

- 红外半球照明灯
- 采用42颗高功率红外灯
- 有效红外照射距离达50平方米
- 红外光角度180°
- 12V直流电源供电, 最大功率20瓦
- 适合室内大范围照明



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
韩国色/dark-gray color	DC12V	0.9KG	675x335x263mm	36pcs/ctn




## LED I130

### Product Features:

- Weatherproof IR Illuminator
- 198pcs  $\phi$  8-14  $\mu$  Strong Infrared LEDs
- 130m Effective IR Range
- IR LED Angle 60° /30° /15° is optional
- 12VDC Input Voltage, Max Power 28W
- IP66 Weatherproof Rating suitable for outdoor use

### 产品特点:

- 红外防水照明灯
- 采用198颗高功率红外灯
- 有效红外照射距离达130米
- 红外光角度60° /30° /15° 可选
- 12V直流电源供电, 最大功率28瓦
- 防水等级IP66, 适合室外安装

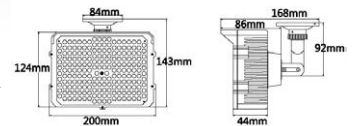

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
韩国色/dark-gray color	DC12V	1KG	675x335x263mm	36pcs/ctn




## LED D40

### Product Features:

- Weatherproof IR Illuminator
- 48pcs  $\phi$  5-14  $\mu$  Strong Infrared LEDs
- 40m Effective IR Range
- IR LED Angle 60° /30° /15° is optional
- 12VDC Input Voltage, Max Power 10W
- IP66 Weatherproof Rating suitable for outdoor use

### 产品特点:

- 红外防水照明灯
- 采用48颗高功率红外灯
- 有效红外照射距离达40米
- 红外光角度60° /30° /15° 可选
- 12V直流电源供电, 最大功率10瓦
- 防水等级IP66, 适合室外安装

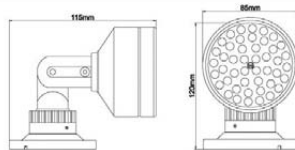

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
韩国色/dark-gray color	DC12V	1.2KG	675x335x263mm	36pcs/ctn




## LED D90

### Product Features:

- Weatherproof IR Illuminator
- 12pcs  $\phi$  10-24  $\mu$  Strong Infrared LEDs
- 90m Effective IR Range
- IR LED Angle 60° /30° /10° is optional
- 12VDC Input Voltage, Max Power 15W
- IP66 Weatherproof Rating suitable for outdoor use

### 产品特点:

- 红外防水照明灯
- 采用12颗高功率红外灯
- 有效红外照射距离达90米
- 红外光角度60° /30° /10° 可选
- 12V直流电源供电, 最大功率15瓦
- 防水等级IP66, 适合室外安装

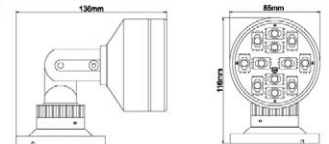

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
韩国色/dark-gray color	DC12V	1.4KG	675x335x263mm	36pcs/ctn



**longse**<sup>®</sup>

# SPEED DOME CAMERA

云台半球摄像机球摄像机



| A unstoppable Clear World

| 清晰世界，永不停止


## LPTA10X 10X Optical Zoom Lens

### Product Features:

- Vandalproof Mini Pan/Tilt/Zoom Speed Dome Camera
- Build-in 10X (f=3.8-38mm) Module
- Horizontal 360° Continuous Rotation, without any Spying Blind Area
- Pan Speed max 50° /second, no Monitoring Dead Zone
- 16pcs Preset Positions easy to tracking
- RS485 Remote Control, Support Pelco D/P protocol
- Sony CCD, 480/500TVL is optional
- IP66 Weatherproof Rating suitable for outdoor use
- Multimedia installation supported

### 产品特点:

- 防爆迷你云台半球摄像机
- 内置10倍光学变焦模组
- 水平360°连续旋转, 无监视盲区
- 水平转速最大50°/每秒
- 16个预置位存储, 定位准确
- RS485远程控制, 支持Pelco D/P协议
- Sony CCD, 480/500TVL可选
- 防水等级IP66, 适合室外安装
- 支持多种安装方式



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	2.2KG	520x496x465mm	12pcs/ctn


## LPTM10X 10X Optical Zoom Lens

### Product Features:

- Vandalproof Mini Pan/Tilt/Zoom Speed Dome Camera
- Build-in 10X (f=3.8-38mm) Module
- Horizontal 360° Continuous Rotation, without any Spying Blind Area
- Pan Speed max 50° /second, no Monitoring Dead Zone
- 16pcs Preset Positions easy to tracking
- RS485 Remote Control, Support Pelco D/P protocol
- Sony CCD, 480/500TVL is optional
- IP66 Weatherproof Rating suitable for outdoor use
- Multimedia installation supported

### 产品特点:

- 防爆迷你云台半球摄像机
- 内置10倍光学变焦模组
- 水平360°连续旋转, 无监视盲区
- 水平转速最大50°/每秒
- 16个预置位存储, 定位准确
- RS485远程控制, 支持Pelco D/P协议
- Sony CCD, 480/500TVL可选
- 防水等级IP66, 适合室外安装
- 支持多种安装方式



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	2.2KG	520x496x465mm	12pcs/ctn


**LPTA** 4-9mm Manual Zoom Lens  
**LPTAX** 4-9mm Dynamic Varifocal Lens (standard)  
 5-15mm Dynamic Varifocal Lens (optional)

**Product Features:**

- Vandalproof Mini Pan/Tilt Speed Dome Camera
- Horizontal 360° Continuous Rotation, without any Spying Blind Area
- Pan Speed max 50° /second, no Monitoring Dead Zone
- 16pcs Preset Positions easy to tracking
- RS485 Remote Control, Support Pelco D/P protocol
- Sony CCD, 420/540/600/700TVL is optional
- IP66 Weatherproof Rating suitable for outdoor use
- Multimedia installation supported

**产品特点:**

- 防爆迷你云台半球摄像机
- 水平360° 连续旋转, 无监视盲区
- 水平转速最大50° 每秒
- 16个预置位存储, 定位准确
- RS485远程控制, 支持Pelco D/P协议
- Sony CCD, 420/540/600/700TVL可选
- 防水等级IP66, 适合室外安装
- 支持多种安装方式



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	2.2KG	520x496x465mm	12pcs/ctn


**LPTM** 4-9mm Manual Zoom Lens  
**LPTMX** 4-9mm Dynamic Varifocal Lens (standard)  
 5-15mm Dynamic Varifocal Lens (optional)

**Product Features:**

- Vandalproof Mini Pan/Tilt Speed Dome Camera
- Horizontal 360° Continuous Rotation, without any Spying Blind Area
- Pan Speed max 50° /second, no Monitoring Dead Zone
- 16pcs Preset Positions easy to tracking
- RS485 Remote Control, Support Pelco D/P protocol
- Sony CCD, 420/540/600/700TVL is optional
- IP66 Weatherproof Rating suitable for outdoor use
- Multimedia installation supported

**产品特点:**

- 防爆迷你云台半球摄像机
- 水平360° 连续旋转, 无监视盲区
- 水平转速最大50° 每秒
- 16个预置位存储, 定位准确
- RS485远程控制, 支持Pelco D/P协议
- Sony CCD, 420/540/600/700TVL可选
- 防水等级IP66, 适合室外安装
- 支持多种安装方式



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	2.2KG	515x390x370mm	12pcs/ctn

**LPT2** 4–9mm Manual Zoom Lens


**LPT2X** 4–9mm Dynamic Varifocal Lens (standard)  
5–15mm Dynamic Varifocal Lens (optional)

### Product Features:

- Plastic Mini Pan/Tilt Speed Dome Camera
- Horizontal 360° Continuous Rotation, without any Spying Blind Area
- Pan Speed max 50° /second, no Monitoring Dead Zone
- 16pcs Preset Positions easy to tracking
- RS485 Remote Control, Support Pelco D/P protocol
- Sony CCD, 420/540/600/700TVL is optional
- Two Brackets included, suitable for Wall or Ceiling installation

### 产品特点:

- 塑胶迷你云台半球摄像机
- 水平360° 连续旋转, 无监视盲区
- 水平转速最大50° 每秒
- 16个预置位存储, 定位准确
- RS485远程控制, 支持Pelco D/P协议
- Sony CCD, 420/540/600/700TVL可选
- 同时提供侧装及吊装支架

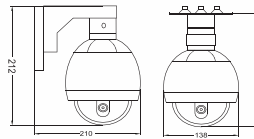

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	2.0KG	520x496x465mm	12pcs/ctn

**LPT24** 4–9mm Manual Zoom Lens


**LPT24X** 4–9mm Dynamic Varifocal Lens (standard)  
5–15mm Dynamic Varifocal Lens (optional)

### Product Features:

- Plastic Mini Pan/Tilt Speed Dome Camera
- Horizontal 360° Continuous Rotation, without any Spying Blind Area
- Pan Speed max 50° /second, no Monitoring Dead Zone
- 16pcs Preset Positions easy to tracking
- RS485 Remote Control, Support Pelco D/P protocol
- Sony CCD, 420/540/600/700TVL is optional
- $\phi$  5mmx24PCS IR LEDs, 20m IR range
- Suitable for Indoor installation

### 产品特点:

- 塑胶迷你云台半球摄像机
- 水平360° 连续旋转, 无监视盲区
- 水平转速最大50° 每秒
- 16个预置位存储, 定位准确
- RS485远程控制, 支持Pelco D/P协议
- Sony CCD, 420/540/600/700TVL可选
- 24颗 $\phi$  5mm红外灯, 红外夜视距离20米
- 适用于室内安装使用



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	1.25KG	515x390x370mm	12pcs/ctn



**SDK24**

### Product Features:

- Mini wireless PTZ Controller
- IR Remote Controller support 99pcs Cameras simultaneously
- RS485 communication, Pelco D/P supported
- 2400/4800/9600bps is optional
- Max 20m Wireless Distanc

### 产品特点:

- 迷你无线云台控制器
- 最多可同时支持99个摄像机
- RS485协议, 支持Pelco D/P
- 2400/4800/9600波特率可选
- 最大遥控距离20米

**longse**<sup>®</sup>

# DOME CAMERA

半球摄像机



Free Space Free Show  
自由空间任我展示

## LPDR


### Product Features:

- Vandalproof Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Standard match with 4-9mm Manual Zoom Lens
- 3-Axis Bracket Built-in
- IP66 Weatherproof Rating suitable for outdoor use

### 产品特点:

- 防爆半球摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- AC24/DC12V双电压可选
- 有匹配侧装支架可选
- 标配4-9mm手动变焦镜头
- 内置三轴支架
- 防水等级IP66, 适合室外安装

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	2.2KG	593x455x217mm	24pcs/ctn



## LVDP


### Product Features:

- Vandalproof Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Matchable Wall Mount Bracket is optional
- Standard match with 4-9mm Manual Zoom Lens
- 3-Axis Bracket Built-in
- Suitable for Indoor Installation

### 产品特点:

- 防爆半球摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 有匹配侧装支架可选
- 标配4-9mm手动变焦镜头
- 内置三轴支架
- 适合室内安装

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.95KG	520x496x465mm	12pcs/ctn



## LVDPB LVDPX


### Product Features:

- Vandalproof Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Double Voltage AC24/DC12 is optional
- Matchable Wall Mount Bracket is optional
- Standard match with 4-9mm Dynamic Varifocal Lens
- 2.8-10mm Manual Zoom Lens is optional
- 3-Axis Bracket Built-in
- Suitable for Indoor Installation

### 产品特点:

- 防爆半球摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- AC24/DC12V双电压可选
- 有匹配侧装支架可选
- 标配4-9mm自动变焦镜头
- 2.8-10mm手动变焦镜头可选
- 内置三轴支架
- 适合室内安装

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.95KG/1.35KG	520x496x465mm	12pcs/ctn



## LCDNT


### Product Features:

- Plastic Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Standard match with 4-9mm Manual Zoom Lens
- 2.8-10mm Manual Zoom Lens is optional
- 3-Axis Bracket Built-in
- Suitable for Indoor Installation

### 产品特点:

- 塑胶半球摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 标配4-9mm手动变焦镜头
- 2.8-10mm 手动变焦镜头可选
- 内置三轴支架
- 适合室内安装

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.45 KG	590x360x200mm	30pcs/ctn

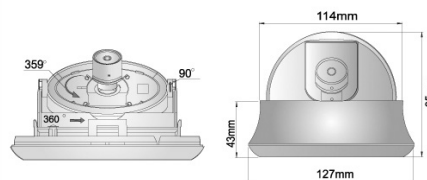

## LCDNT20


### Product Features:

- Plastic IR Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  5mmx21PCS IR LEDs, 20m IR range
- Standard match with 4-9mm Manual Zoom Lens
- 2.8-10mm Manual Zoom Lens is optional
- 3-Axis Bracket Built-in
- Suitable for Indoor Installation

### 产品特点:

- 红外塑胶半球摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 21颗  $\phi$  5mm红外灯, 红外夜视距离20米
- 标配4-9mm手动变焦镜头
- 2.8-10mm 手动变焦镜头可选
- 内置三轴支架
- 适合室内安装

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.45 KG	590x360x200mm	30pcs/ctn

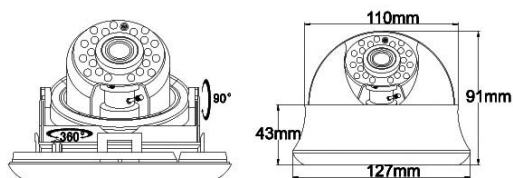




## LCDS

### Product Features:

- Plastic Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Standard match with 3.6mm/F2.0 Board Lens
- High Light-through Cover, Elegant Housing
- Suitable for Indoor Installation

### 产品特点:

- 塑胶半球摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 标配3.6mm/F2.0板机镜头
- 高透光罩, 外形小巧美观
- 适合室内安装



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
黑色/black	DC12V	0.25KG	590x360x200mm	30pcs/ctn




## LCDM

### Product Features:

- Plastic Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Standard match with 3.6mm/F2.0 Board Lens
- High Light-through Cover, Elegant Housing
- Suitable for Indoor Installation

### 产品特点:

- 塑胶半球摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 标配3.6mm/F2.0板机镜头
- 高透光罩, 外形优雅美观
- 适合室内安装



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
黑色/black	DC12V	0.35KG	590x360x200mm	30pcs/ctn



## LCDR

### Product Features:

- Plastic Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Standard match with 3.6mm/F2.0 Board Lens
- 3-Axis Bracket Built-in
- Suitable for Indoor Installation

### 产品特点:

- 塑胶半球摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 标配3.6mm/F2.0板机镜头
- 内置三轴支架
- 适合室内安装



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.3KG	590x360x200mm	30pcs/ctn




## LCDH

### Product Features:

- Plastic Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Standard match with 4-9mm Manual Zoom Lens
- 3-Axis Bracket Built-in
- Suitable for Indoor Installation

### 产品特点:

- 塑胶半球摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 标配4-9mm手动变焦镜头
- 内置三轴支架
- 适合室内安装



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
黑色/black	DC12V	0.6KG	515x390x370mm	36pcs/ctn






## LCDP

### Product Features:

- Plastic Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600TVL is optional
- Standard match with 3.6mm/F2.0 Board Lens
- 3-Axis Bracket Built-in
- Suitable for Indoor Installation

### 产品特点:

- 塑胶半球摄像机
- Sony/Sharp CCD可选
- 420/540/600TVL可选
- 标配3.6mm/F2.0板机镜头
- 内置三轴支架
- 适合室内安装



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.6KG	590x360x200mm	30pcs/ctn




## LCDMIR24

### Product Features:

- Plastic IR Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600TVL is optional
- $\phi$  5mmx24PCS IR LEDs, 20m IR range
- Standard match with 3.6mm/F2.0 Board Lens
- Suitable for Indoor Installation

### 产品特点:

- 红外塑胶半球摄像机
- Sony/Sharp CCD可选
- 420/540/600TVL可选
- 24颗 $\phi$  5mm红外灯, 红外夜视距离20米
- 标配3.6mm/F2.0板机镜头
- 适合室内安装



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
黑色/black	DC12V	0.35KG	515x390x370mm	50pcs/ctn




## LIRD30

### Product Features:

- Plastic IR Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600TVL is optional
- $\phi$  5mmx30PCS IR LEDs, 25m IR range
- Standard match with 3.6mm/F2.0 Board Lens
- Suitable for Indoor Installation

### 产品特点:

- 红外塑胶半球摄像机
- Sony/Sharp CCD可选
- 420/540/600TVL可选
- 24颗 $\phi$  5mm红外灯, 红外夜视距离20米
- 标配3.6mm/F2.0板机镜头
- 适合室内安装



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
黑色/白色/black/white	DC12V	0.3KG	590x360x200mm	30pcs/ctn




## LIRD30

### Product Features:

- Plastic IR Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600TVL is optional
- $\phi$  5mmx30PCS IR LEDs, 25m IR range
- Standard match with 3.6mm/F2.0 Board Lens
- Suitable for Indoor Installation

### 产品特点:

- 红外塑胶半球摄像机
- Sony/Sharp CCD可选
- 420/540/600TVL可选
- 30颗 $\phi$  5mm红外灯, 红外夜视距离25米
- 标配3.6mm/F2.0板机镜头
- 适合室内安装

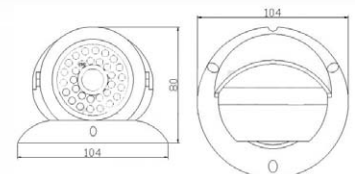

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
黑色/black	DC12V	0.6KG	515x390x370mm	36pcs/ctn




## LIRDB

### Product Features:

- Vandalproof IR Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600TVL is optional
- $\phi$  5mmx24PCS IR LEDs, 20m IR range
- Standard match with 3.6mm/F2.0 Board Lens
- IP65 Weatherproof Rating, Great Indoors or Outdoors

### 产品特点:

- 红外防爆半球摄像机
- Sony/Sharp CCD可选
- 420/540/600TVL可选
- 24颗  $\phi$  5mm红外灯, 红外夜视距离20米
- 标配3.6mm/F2.0板机镜头
- 防水等级IP65, 室内室外均可安装



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
新灰色/银色/new grey/silver	DC12V	0.45KG	590x360x200mm	30pcs/ctn




## LIRDE

### Product Features:

- Vandalproof IR Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600TVL is optional
- $\phi$  5mmx24PCS IR LEDs, 20m IR range
- Standard match with 3.6mm/F2.0 Board Lens
- IP65 Weatherproof Rating, Great Indoors or Outdoors

### 产品特点:

- 红外防爆半球摄像机
- Sony/Sharp CCD可选
- 420/540/600TVL可选
- 24颗  $\phi$  5mm红外灯, 红外夜视距离20米
- 标配3.6mm/F2.0板机镜头
- 防水等级IP65, 室内室外均可安装



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
黑色/black	DC12V	0.6KG	515x390x370mm	36pcs/ctn




## LIRDC

### Product Features:

- Vandalproof IR Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  5mmx36PCS IR LEDs, 30m IR range
- 4-9mm Manual Zoom Lens with external adjustment
- 2.8-10mm Manual Zoom Lens is optional
- IP65 Weatherproof Rating, Great Indoors or Outdoors

### 产品特点:

- 红外防爆半球摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 36颗  $\phi$  5mm红外灯, 红外夜视距离30米
- 标配4-9mm手动变焦镜头, 可外部调焦
- 2.8-10mm 手动变焦镜头可选
- 防水等级IP65, 室内室外均可安装



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
新灰色/银色/new grey/silver	DC12V	0.85KG	515x390x370mm	36pcs/ctn




## LIRDT

### Product Features:

- Vandalproof IR Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  5mmx36PCS IR LEDs, 30m IR range
- 4-9mm Manual Zoom Lens with external adjustment
- 2.8-10mm Manual Zoom Lens is optional
- IP65 Weatherproof Rating, Great Indoors or Outdoors
- Bracket Included, suitable for Wall or Ceiling installation

### 产品特点:

- 红外防爆半球摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 36颗  $\phi$  5mm红外灯, 红外夜视距离30米
- 标配4-9mm手动变焦镜头, 可外部调焦
- 2.8-10mm 手动变焦镜头可选
- 防水等级IP66, 室内室外均可安装
- 包含支架, 吊装侧装均可



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.3KG	590x360x200mm	30pcs/ctn




## LVD25

### Product Features:

- Vandalproof Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600TVL is optional
- Standard match with 3.6mm/F2.0 Board Lens
- High Light-through Cover, Elegant Housing
- Suitable for Indoor Installation

### 产品特点:

- 防爆半球摄像机
- Sony/Sharp CCD可选
- 420/540/600TVL可选
- 标配3.6mm/F2.0板机镜头
- 高透光罩, 外形优雅美观
- 适合室内安装



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.35KG	590x360x200mm	30pcs/ctn


## LVDN25

### Product Features:

- Vandalproof Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Standard match with 3.6mm/F2.0 Board Lens
- 3-Axis Bracket Built-in
- Suitable for Indoor Installation

### 产品特点:

- 防爆半球摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 标配3.6mm/F2.0板机镜头
- 内置三轴支架
- 适合室内安装

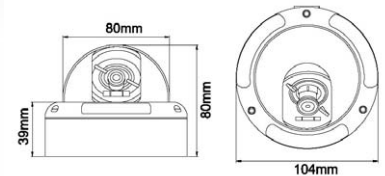

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.5KG	590x360x200mm	30pcs/ctn




## LVDN35

### Product Features:

- Vandalproof Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Double Voltage AC24/DC12 is optional
- Standard match with 4-9mm Manual Zoom Lens
- 2.8-10mm Manual Zoom Lens is optional
- 3-Axis Bracket Built-in
- Suitable for Indoor Installation

### 产品特点:

- 防爆半球摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- AC24/DC12V双电压可选
- 标配4-9mm手动变焦镜头
- 2.8-10mm手动变焦镜头可选
- 内置三轴支架
- 适合室内安装



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.6 KG	593x455x217mm	24pcs/ctn


## LVDN45

### Product Features:

- Vandalproof Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Double Voltage AC24/DC12 is optional
- Standard match with 4-9mm Manual Zoom Lens
- 2.8-10mm Manual Zoom Lens is optional
- 3-Axis Bracket Built-in
- Suitable for Indoor Installation

### 产品特点:

- 防爆半球摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- AC24/DC12V双电压可选
- 标配4-9mm手动变焦镜头
- 2.8-10mm手动变焦镜头可选
- 内置三轴支架
- 适合室内安装

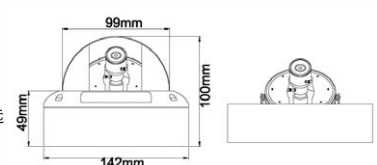

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.75 KG	590x360x200mm	30pcs/ctn

## LVDS


### Product Features:

- Vandalproof Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Standard match with 3.6mm/F2.0 Board Lens
- High Light-through Cover, Elegant Housing
- Suitable for Indoor Installation

### 产品特点:

- 防爆半球摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 标配3.6mm/F2.0板机镜头
- 高透光罩, 外形优雅美观
- 适合室内安装

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
银色/silver	DC12V	0.6KG	590x360x200mm	30pcs/ctn



## LVDK


### Product Features:

- Vandalproof Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Standard match with 4-9mm Manual Zoom Lens
- High Light-through Cover, Elegant Housing
- Suitable for Indoor Installation

### 产品特点:

- 防爆半球摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 标配4-9mm手动变焦镜头
- 高透光罩, 外形优雅美观
- 适合室内安装

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
银色/silver	DC12V	0.85KG	593x455x217mm	24pcs/ctn



## LVDLIR21


### Product Features:

- Vandalproof Dome Camera
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- $\phi$  5mmx21PCS IR LEDs, 20m IR range
- Standard match with 4-9mm Manual Zoom Lens
- Suitable for Indoor Installation

### 产品特点:

- 防爆半球摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 21颗 $\phi$  5mm红外灯, 红外夜视距离20米
- 标配4-9mm手动变焦镜头
- 适合室内安装


颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
银色/silver	DC12V	1.3KG	590x360x200mm	30pcs/ctn



**longse**<sup>®</sup>

# MINIATURE CAMERA

微型摄像机

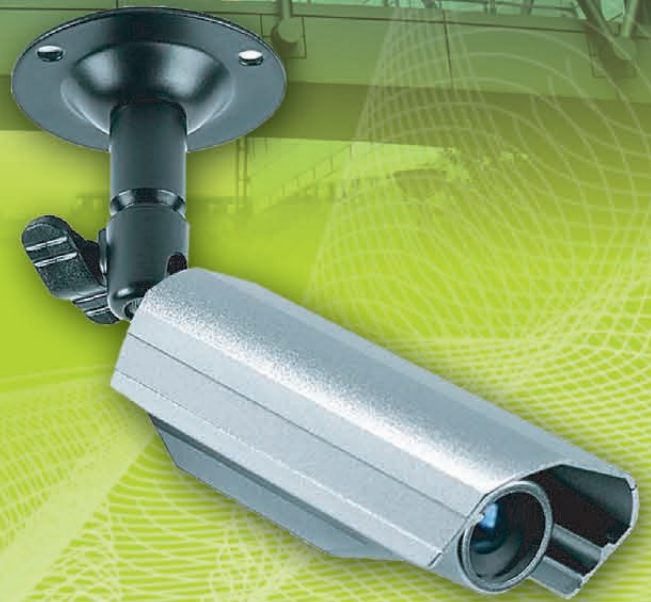

Small Camera, Big World

小相机，大世界




## LMCM25

### Product Features:

- Miniature camera
- Sony/Sharp CCD is optional
- 3.7mm Taper Pinhole Lens
- AL casing, strong and beautiful
- Suitable to the installation in lift and corridor etc.

### 产品特点:

- 微型摄像机
- SONY/SHARP CCD可选
- 标配3.7mm针孔镜头
- 铝合金外壳坚固美观
- 适合电梯楼道等场所安装



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
黑色/black	DC12V	0.12KG	590x435x390mm	24pcs/ctn



## LBWB

### Product Features:

- Miniature Bullet Camera
- SONY/SHARP CCD is optional
- 420TV Lines
- Board Lens 3.6mm/F2.0
- AL casing hard and beautiful

### 产品特点:

- 微型子弹摄像机
- SONY/SHARP CCD可选
- 420线
- 标配3.6mm板机镜头
- 铝合金外壳坚固美观



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
黑色/black	DC12V	0.3KG	675x335x263mm	36pcs/ctn




## LBWA

### Product Features:

- Miniature Bullet Camera
- SONY/SHARP CCD is optional
- 420TV Lines
- Board Lens 3.6mm/F2.0
- AL casing hard and beautiful

### 产品特点:

- 微型子弹摄像机
- SONY/SHARP CCD可选
- 420线
- 标配3.6mm板机镜头
- 铝合金外壳坚固美观



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
银色/silver	DC12V	0.3KG	675x335x263mm	36pcs/ctn




## LBPB

### Product Features:

- Miniature Bullet Camera
- SONY/SHARP CCD is optional
- 420TV Lines
- Lens:3.7mm Taper Pinhole Lens
- AL casing hard and beautiful

### 产品特点:

- 微型子弹摄像机
- SONY/SHARP CCD可选
- 420线
- 标配3.7mm针孔镜头
- 铝合金外壳坚固美观



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
黑色/black	DC12V	0.25KG	675x335x263mm	36pcs/ctn

longse®

SPY  
CAMERA

隐型摄像机



A Hidden Eye  
隐藏的眼睛

## LUG


### Product Features:

- UFO Shape Spy Camera
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Standard match with 3.6mm/F2.0 Board Lens
- AI Casing, Strong and Beautiful
- Suitable for Lift and Corridor Installation

### 产品特点:

- 飞碟型摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 标配3.6mm/F2.0板机镜头
- 铝合金外壳坚固美观
- 适合电梯楼道等场所安装

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
银色/silver	DC12V	0.3KG	510x435x390mm	24pcs/ctn



## LSDC


### Product Features:

- Smoke Detector Shape Spy Camera
- Sony/Sharp CCD is optional
- 420/540/600/700TVL is optional
- Standard match with 3.6mm/F2.0 Board Lens
- Suitable for Hidden Installation

### 产品特点:

- 烟感型摄像机
- Sony/Sharp CCD可选
- 420/540/600/700TVL可选
- 标配3.6mm/F2.0板机镜头
- 适合隐蔽安装

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.3KG	510x435x390mm	24pcs/ctn



## LPRC


### Product Features:

- PIR Sharp Spy Camera
- Sony/Sharp CCD is optional
- 420/540/600TVL is optional
- Standard match with 3.7mm Taper Pinhole Lens
- AI Casing, Strong and Beautiful
- Suitable for Hidden Installation

### 产品特点:

- 烟感型摄像机
- Sony/Sharp CCD可选
- 420/540/600TVL可选
- 标配3.7mm针孔镜头
- 铝合金外壳坚固美观
- 适合隐蔽安装

颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	0.35KG	510x435x390mm	24pcs/ctn





longse®

# IP CAMERA

网络摄像机



No matter where you are  
It brings distance near

天涯若比邻

## LNIC60

### Product Features:

- Weatherproof IP Camera
- 1/3" Sony Super HAD CCD
- 420/540TVL is optional
- $\phi$  8mmx36PCS IR LEDs, 50m IR range
- Standard match with 8mm/F2.0 CS Lens
- MPEG-4 Compression, Support D1
- Client Software, IE, Iphone Remote View
- IP66 Weatherproof Rating suitable for outdoor use

### 产品特点:

- 红外防水网络摄像机
- 1/3" Sony Super HAD CCD
- 420/540TVL可选
- 36颗  $\phi$  8mm红外灯, 红外夜视距离50米
- 标配8mm CS镜头
- MPEG-4压缩方式, 支持D1图像处理
- 支持IE/Iphone浏览, 客户端软件
- 防水等级IP66, 适合室外安装



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
银色/silver	DC12V	1.3KG	355x315x385mm	16pcs/ctn


## LNBR24

### Product Features:

- Pan/Tilt Dome IP Camera
- 1/3" Sony Super HAD CCD
- 420/540TVL is optional
- $\phi$  5mmx24PCS IR LEDs, 20m IR range
- Horizontal 360° Continuous Rotation, without any Spying Blind Area
- Pan Speed max 50° /second, no Monitoring Dead Zone
- 16pcs Preset Positions easy to tracking
- RS485 Remote Control, Support Pelco D/P protocol
- Standard match with 6mm/F2.0 Board Lens
- MPEG-4 Compression, Support D1
- Client Software, IE, Iphone Remote View

### 产品特点:

- 匀速红外网络球型摄像机
- 1/3" Sony Super HAD CCD
- 420/540TVL可选
- 24颗  $\phi$  5mm红外灯, 红外夜视距离20米
- 水平360° 连续旋转, 无监视盲区
- 水平转速最大50° 每秒
- 16个预置位存储, 定位准确
- RS485远程控制, 支持Pelco D/P协议
- 标配6mm板机镜头
- MPEG-4压缩方式, 支持D1图像处理
- 支持IE/Iphone浏览, 客户端软件



颜色/color	电压/voltage	重量/weight	包装尺寸/package dimension	包装数量/qty
白色/white	DC12V	1.3KG	380x280x120mm	20pcs/ctn

# BOX CAMERA

## 枪型摄像机


### LBCK

#### Product Features:

- Standard Box Camera
- 1/3" Sony Super HAD CCD
- 420/540TVL is optional
- AES/DC Auto Iris Function
- BLC and AGC Function
- AL casing, strong and beautiful

#### 产品特点:

- 标准枪型摄像机
- 1/3" Sony Super HAD CCD
- 420/540TVL可选
- AES电子快门/DC自动光圈功能
- BLC背光补偿, AGC自动增益控制
- 铝合金外壳坚固美观

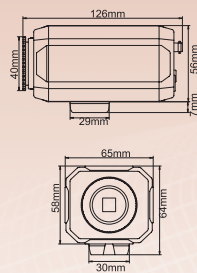

颜色/color 银色/silver	电压/voltage DC12V	重量/weight 0.6KG	包装尺寸/package dimension 67x335x263mm	包装数量/qty 36pcs/ctn
-----------------------	---------------------	--------------------	--	-----------------------

**longse**<sup>®</sup>

# DIGITAL VIDEO RECORDER

数字硬盘录像机



All-time and All-round Protection for You

保护，随时随地

## LS-9004H / LS-9004S / LS-9004D / LS-9004K



LS-9004H




LS-9004S



LS-9004D



LS-9004K



## Product Features:

- H.264 compression
- Two USB interface, USB2.0 for data backup, USB1.1 for mouse operation
- One 3.5" SATA HDD
- Special file system for security
- 16 bit color translucent user-friendly GUI, with notes for selected menu items
- Optimized 4 channel simultaneously playback
- Double level user management
- Support live view, parameter setting and copy playback video via network

## 产品特点:

- 视频压缩格式为标准H.264
- 两个USB接口, 一个用于数据备份, 一个用于鼠标操作
- 配置了一个3.5英寸硬盘的小型机箱
- 为了分段录像不产生碎片、数据保密性而在设备的硬盘中使用的是普通PC操作系统无法识别的特殊的文件管理系统
- 16位真色半透明图形化菜单界面, 菜单选项注释提示
- 优化的同步回放
- 两级用户权限管理
- 支持网络对本机多画面实时浏览, 参数设置, 拷贝或回放录像。

## Chief Parameter:

Item	Device Parameter	Specification
System	Language	English/ Chinese/ Russian/ Italian/ Portuguese/ Romanian
	GUI	Graphic menu (OSD Menu)
	password	user password, administrator password
Video	Video in	4ch composite video input 1.0Vp-p, impedance75Ω, BNC
	Video out	1ch composite video output, BNC
	Video display	4ch: 1/4channel switch
	Video standard	PAL, 25f/s, CCIR625line, 50scene NTSC, 30f/s, CCIR525line, 60scene
Audio	Audio input	4ch audio input, impedance600Ω, RCA
	Audio output	1ch audio output, impedance600Ω, RCA
	Basic electricity output	Linearity electricity
	Record style	Audio video recorded simultaneously
	Audio compression	ADPCM
Picture proceeding and store	Picture compression	H.264
	Picture resolution	CIF/HD1/D1 (support 4ch D1)
	Streaming style	ISO14496-10
	Audio style	ADPCM
	Video code rate (4CH)	CIF: 384~768 Kbps (normal) HD1: 512~1024Kbps (high) D1: 512~1024Kbps (highest)
	Audio code rate	32KB/s
	Data storage	SATA HDD storage (optional)
Alarm	Alarm input	4 alarm input
	Alarm output	1 alarm output
Connector	Serial interface	Support 1 RS485
	Network interface	RJ45, 10M/100M
VGA	VGA output	800x600, 1024x768, 1280x1024, 1366x768, 1440x900
Software upgrade	Support USB firmware upgrade and remote upgrade by internet	
others	Voltage input	AC: 110~240V
	Power Consumption	6W without HDD
	Heat elimination way	By heat sink of high thermal conductivity
	Working temperature	-10---50℃

## 性能参数:

项目	设备参数	规格说明
系统	操作语言	中文/英文/俄语/意大利语/葡萄牙语/罗马尼亚语
	图形用户界面	图形化菜单操作界面 (OSD菜单)
	密码安全	用户密码、管理员密码两级管理
视频	视频输入	4路复合视频输入 幅度1.0V p-p, 阻抗75Ω, BNC
	视频输出	单路视频输出 幅度1.0V p-p, 阻抗75Ω, BNC
	视频显示	4路: 一画面, 四画面显示可切换
	视频标准	PAL制式, 25帧/秒, CCIR625线, 50场 NTSC制式, 30帧/秒, CCIR525线, 60场
音频	音频输入	4路音频输入, 阻抗600Ω, RCA
	音频输出	单路音频输出, 阻抗600Ω, RCA
	基本输出电平	线性电平
	录音方式	声音与视频同步录制
	音频压缩	ADPCM
图像处理及存储	图像压缩	H.264
	图像分辨率	CIF/HD1/D1可选 (支持4路D1)
	视频流标准	ISO14496-10
	音频流标准	ADPCM
	视频码率	CIF: 384, 512, 768 Kbps (标准的) 三档可调 HD1: 512, 768, 1024 Kbps (较高的) 三档可调 D1: 896, 1024, 1280Kbps (最高的) 三档可调
	音频码率	32KB/s
	数据存储	支持主流容量的SATA HDD
报警	报警输入	4个报警输入
	报警输出	1个报警输出
通信接口	串行接口	支持1个RS485接口
	网络接口	RJ45, 10M/100M自适应网络接口
USB	鼠标	USB1.1
	U盘	USB2.0
VGA	VGA输出	支持800×600、1024×768、1280×1024、1366×768、1440×900五种分辨率。
	IE端远程浏览	通过有线网络实现视频预览、录像下载、参数配置等功能
软件升级	本机支持U盘升级, 或者通过网络升级	
其它	输入电压	AC:110~240V
	功耗	6W 不带硬盘与外设
	散热方式	配置高导热散热片
	工作温度	-10---50℃

## Basic Working Parameter:

Item	Parameter	Description
Voltage input	12V	DC 12V
Video impedance input	75Ω	75Ω each channel
Video output	1Vp-p	1Vp-p CVBS signal
SATA HDD	One SATA with mainstream capability	
Working temperature	-10---50℃	Under normal conditions
I/O Port	0~2V	Low level warning
	5V~30V	High level warning
RS485	Pelco-D, Pelco-P	

## 基本工作参数:

项目	工作参数	说明
输入电压	12V	直流 12V
视频输入阻抗	75Ω	每路视频输入阻抗均75Ω
视频输出	1Vp-p	输出一个1Vp-p CVBS模拟信号
硬盘SATA接口	一个SATA接口, 支持主流容量SATA硬盘	
工作温度	-10---50℃	指的是通风良好条件下的环境温度
I/O接口	0~2V	为低电平报警
	5V~30V	为高电平报警
RS485串口	接云台协议Pelco-D, Pelco-P	

## LS-9204H

### Product Features:

- H.264 compression
- Two USB interface, USB2.0 for data backup, USB1.1 for mouse operation
- One 3.5" SATA HDD
- Special file system for security
- 16 bit color translucent user-friendly GUI, with notes for selected menu items
- Optimized 4 channel simultaneously playback
- Double level user management
- Support live view, parameter setting and copy playback video via network

### 产品特点:

- 视频压缩格式为标准H.264
- 两个USB接口, 一个用于数据备份, 一个用于鼠标操作
- 配置了一个3.5英寸硬盘的小型机箱
- 为了分段录像不产生碎片、数据保密性而在设备的硬盘中使用的是普通PC操作系统无法识别的特殊的文件管理系统
- 16位真色半透明图形化菜单界面, 菜单选项注释提示
- 优化的同步回放
- 两级用户权限管理
- 支持网络对本机多画面实时浏览, 参数设置, 拷贝或回放录像。



### Chief Parameter:

Item	Device Parameter	Specification
System	Language	English/ Chinese/ Russian/ Italian/ Portuguese/ Romanian
	GUI	Graphic menu (OSD Menu)
	password	user password, administrator password
Video	Video in	4ch composite video input 1.0Vp-p, impedance75Ω, BNC
	Video out	1ch composite video output,BNC
	Video display	4ch: 1/4channel switch
	Video standard	PAL, 25f/s, CCIR625line, 50scene NTSC, 30f/s, CCIR525line, 60scene
Audio	Audio input	4ch audio input, impedance600Ω, RCA
	Audio output	1ch audio output, impedance600Ω, RCA
	Basic electricity output	Linearity electricity
	Record style	Audio video recorded simultaneously
Picture proceeding and store	Audio compression	ADPCM
	Picture compression	H.264
	Picture resolution	CIF/HD1/D1 (support 4ch D1)
	Streaming style	ISO14496-10
	Audio style	ADPCM
	Video code rate (4CH)	CIF: 384~768 Kbps (normal) HD1: 512~1024Kbps (high) D1: 512~1024Kbps (highest)
	Audio code rate	32KB/s
Alarm	Alarm input	4 alarm input
Connector	Alarm output	1 alarm output
	Serial interface	Support 1 RS485
VGA	Network interface	RJ45, 10M/100M
	VGA output	800x600, 1024x768, 1280 x1024, 1366 x768, 1440 x900
Software upgrade	Support USB firmware upgrade and remote upgrade by internet	
Others	Voltage input	AC: 110~240V
	Power Consumption	6W without HDD
	Heat elimination way	By heat sink of high thermal conductivity and high performance cooling fan
	Working temperature	-10---50℃

### Basic Working Parameter:

Item	Parameter	Description
Voltage input	12V	DC 12V
Video impedance input	75Ω	75Ω each channel
Video output	1Vp-p	1Vp-p CVBS signal
SATA HDD	Two SATA with mainstream capability	
Working temperature	-10---50℃	Under normal conditions
I/O Port	0~2V	Low level warning
	5V-30V	High level warning
RS485	Pelco-D, Pelco-P	

### 性能参数:

项目	设备参数	规格说明
系统	操作语言	中文/英文/俄语/意大利语/葡萄牙语/罗马尼亚语
	图形用户界面	图形化菜单操作界面 (OSD菜单)
	密码安全	用户密码、管理员密码两级管理
视频	视频输入	4路复合视频输入 幅度1.0V p-p, 阻抗75Ω, BNC
	视频输出	单路视频输出 幅度1.0V p-p, 阻抗75Ω, BNC
	视频显示	4路: 一画面, 四画面显示可切换
	视频标准	PAL制式, 25帧/秒, CCIR625线, 50场 NTSC制式, 30帧/秒, CCIR525线, 60场
音频	音频输入	4路音频输入, 阻抗600Ω, RCA
	音频输出	单路音频输出, 阻抗600Ω, RCA
	基本输出电平	线性电平
图像处理及存储	录音方式	声音与视频同步录制
	音频压缩	ADPCM
	图像压缩	H.264
	图像分辨率	CIF/HD1/D1可选 (支持4路D1)
	视频流标准	ISO14496-10
	音频流标准	ADPCM
	视频码率	CIF: 384, 512, 768 Kbps (标准的) 三档可调 HD1: 512, 768, 1024 Kbps (较高的) 三档可调 D1: 896, 1024, 1280Kbps (最高的) 三档可调
	音频码率	32KB/s
	数据存储	支持主流容量的SATA HDD
	报警	报警输入
通信接口	报警输出	1个报警输出
	串行接口	支持1个RS485接口
USB	网络接口	RJ45, 10M/100M自适应网络接口
	鼠标	USB1.1
VGA	U盘	USB2.0
	VGA输出	支持800×600、1024×768、1280×1024、1366×768、1440×900五种分辨率、IE端远程浏览
软件升级	通过有线网络实现视频预览、录像下载、参数配置等功能	
其它	软件升级	本机支持U盘升级, 或者通过网络升级
	输入电压	AC:110~240V
	功耗	6W 不带硬盘与外设
	散热方式	配置高导热散热片及高性能风扇
工作温度	-10---50℃	

### 基本工作参数:

项目	工作参数	说明
输入电压	12V	直流 12V
视频输入阻抗	75Ω	每路视频输入阻抗均75Ω
视频输出	1Vp-p	输出一个1Vp-p CVBS模拟信号
硬盘SATA接口	两个SATA接口	支持主流容量SATA硬盘
工作温度	-10---50℃	指的是通风良好条件下的环境温度
I/O接口	0~2V	为低电平报警
	5V-30V	为高电平报警
RS485串口		接云台协议Pelco-D, Pelco-P

## LS-9008H / LS-9008S / LS-9008D / LS-9008K



LS-9008H



LS-9008S



LS-9008D



LS-9008K



## Product Features:

- H.264 compression
- Two USB interface, USB2.0 for data backup, USB1.1 for mouse operation
- One 3.5" SATA HDD
- Special file system for security
- 16 bit color translucent user-friendly GUI, with notes for selected menu items
- Optimized 4 channel simultaneously playback
- Double level user management
- Support live view, parameter setting and copy playback video via network

## 产品特点:

- 视频压缩格式为标准H.264
- 两个USB接口，一个用于数据备份，一个用于鼠标操作
- 配置了一个3.5英寸硬盘的小型机箱
- 为了分段录像不产生碎片、数据保密性而在设备的硬盘中使用的是普通PC操作系统无法识别的特殊的文件管理系统
- 16位真色半透明图形化菜单界面，菜单选项注释提示
- 优化的同步回放
- 两级用户权限管理
- 支持网络对本机多画面实时浏览，参数设置，拷贝或回放录像。

## Chief Parameter:

Item	Device Parameter	Specification
System	Language	English/ Chinese/ Russian/ Italian/ Portuguese/ Romanian
	GUI	Graphic menu (OSD Menu)
	password	user password, administrator password
Video	Video in	8ch composite video input 1.0Vp-p, impedance75Ω, BNC
	Video out	1ch composite video output, BNC
	Video display	8channel: 1/4/9 channel switch
	Video standard	PAL, 25f/s, CCIR625line, 50scene NTSC, 30f/s, CCIR525line, 60scene
Audio	Audio input	8ch audio input, impedance600Ω, RCA
	Audio output	1ch audio output, impedance600Ω, RCA
	Basic electricity output	Linearity electricity
	Record style	Audio video recorded simultaneously
	Audio compression	ADPCM
Picture proceeding and store	Picture compression	H.264
	Picture resolution	CIF/HD1/D1 (support 2* D1+6*CIF)
	Streaming style	ISO14496-10
	Audio style	ADPCM
	Video code rate (8CH)	CIF: 384~768 Kbps (normal)
		HD1: 512~1024Kbps (high) D1: 512~1024Kbps (highest)
	Audio code rate	32KB/s
Data storage	SATA HDD storage (optional)	
Alarm	Alarm input	4 alarm input
	Alarm output	1 alarm output
Connector	Serial interface	Support 1 RS485
	Network interface	RJ45, 10M/100M
VGA	VGA output	800x600, 1024x768, 1280 x1024, 1366 x768, 1440 x900
Software upgrade	Support USB firmware upgrade and remote upgrade by internet	
others	Voltage input	AC: 110~240V
	Power Consumption	6W without HDD
	Heat elimination way	By heat sink of high thermal conductivity
	Working temperature	-10----50℃

## 性能参数:

项目	设备参数	规格说明
系统	操作语言	中文/英文/俄语/意大利语/葡萄牙语/罗马尼亚语
	图形用户界面	图形化菜单操作界面 (OSD菜单)
	密码安全	用户密码、管理员密码两级管理
视频	视频输入	8路复合视频输入 幅度1.0V p-p, 阻抗75Ω, BNC
	视频输出	单路视频输出 幅度1.0V p-p, 阻抗75Ω, BNC
	视频显示	8路: 一画面, 四画面, 九画面显示可切换)
	视频标准	PAL制式, 25帧/秒, CCIR625线, 50场 NTSC制式, 30帧/秒, CCIR525线, 60场
音频	音频输入	8路音频输入, 阻抗600Ω, RCA
	音频输出	单路音频输出, 阻抗600Ω, RCA
	基本输出电平	线性电平
	录音方式	声音与视频同步录制
图像处理及存储	音频压缩	ADPCM
	图像压缩	H.264
	图像分辨率	CIF/HD1/D1可选 (支持2*D1+6*CIF)
	视频流标准	ISO14496-10
	音频流标准	ADPCM
	视频码率	CIF: 384, 512, 768 Kbps (标准的) 三档可调
		HD1: 512, 768, 1024 Kbps (较高的) 三档可调 D1: 896, 1024, 1280Kbps (最高的) 三档可调
	音频码率	32KB/s
数据存储	支持主流容量的SATA HDD	
报警	报警输入	4个报警输入
	报警输出	1个报警输出
通信接口	串行接口	支持1个RS485接口
	网络接口	RJ45, 10M/100M自适应网络接口
USB	鼠标	USB1.1
	U盘	USB2.0
VGA	VGA输出	支持800×600、1024×768、1280×1024、1366×768、1440×900五种分辨率。
	IE端远程浏览	通过有线网络实现视频预览、录像下载、参数配置等功能
软件升级	本机支持U盘升级, 或者通过网络升级	
其它	输入电压	AC:110~240V
	功耗	6W 不带硬盘与外设
	散热方式	配置高导热散热片
	工作温度	-10----50℃

## Basic Working Parameter:

Item	Parameter	Description
Voltage input	12V	DC 12V
Video impedance input	75Ω	75Ω each channel
Video output	1Vp-p	1Vp-p CVBS signal
SATA HDD	One SATA with mainstream capability	
Working temperature	-10----50℃	Under normal conditions
I/O Port	0~2V	Low level warning
	5V~30V	High level warning
RS485	Pelco-D, Pelco-P	

## 基本工作参数:

项目	工作参数	说明
输入电压	12V	直流 12V
视频输入阻抗	75Ω	每路视频输入阻抗均75Ω
视频输出	1Vp-p	输出一个1Vp-p CVBS模拟信号
硬盘SATA接口	一个SATA接口, 支持主流容量SATA硬盘	
工作温度	-10----50℃	指的是通风良好条件下的环境温度
I/O接口	0~2V	为低电平报警
	5V~30V	为高电平报警
RS485串口	接云台协议Pelco-D, Pelco-P	

## LS-9208H

### Product Features:

- H.264 compression
- Two USB interface, USB2.0 for data backup, USB1.1 for mouse operation
- One 3.5" SATA HDD
- Special file system for security
- 16 bit color translucent user-friendly GUI, with notes for selected menu items
- Optimized 4 channel simultaneously playback
- Double level user management
- Support live view, parameter setting and copy playback video via network

### 产品特点:

- 视频压缩格式为标准H.264
- 两个USB接口，一个用于数据备份，一个用于鼠标操作
- 配置了一个3.5英寸硬盘的小型机箱
- 为了分段录像不产生碎片、数据保密性而在设备的硬盘中使用的是普通PC操作系统无法识别的特殊的文件管理系统
- 16位真色半透明图形化菜单界面，菜单选项注释提示
- 优化的同步回放
- 两级用户权限管理
- 支持网络对本机多画面实时浏览，参数设置，拷贝或回放录像。



### Chief Parameter:

Item	Device Parameter	Specification
System	Language	English/ Chinese/ Russian/ Italian/ Portuguese/ Romanian
	GUI	Graphic menu (OSD Menu)
	password	user password, administrator password
Video	Video in	8ch composite video input 1.0Vp-p, impedance75Ω, BNC
	Video out	1ch composite video output, BNC
	Video display	8channel: 1/4/9 channel switch
	Video standard	PAL, 25f/s, CCIR625line, 50scene NTSC, 30f/s, CCIR525line, 60scene
Audio	Audio input	8ch audio input, impedance600Ω, RCA
	Audio output	1ch audio output, impedance600Ω, RCA
	Basic electricity output	Linearity electricity
	Record style	Audio video recorded simultaneously
	Audio compression	ADPCM
Picture proceeding and store	Picture compression	H.264
	Picture resolution	CIF/HD1/D1 (support 2* D1+6*CIF)
	Streaming style	ISO14496-10
	Audio style	ADPCM
	Video code rate (8CH)	CIF: 384-768 Kbps (normal) HD1: 512-1024Kbps (high) D1: 512-1024Kbps (highest)
	Audio code rate	32KB/s
	Data storage	SATA HDD storage (optional)
Alarm	Alarm input	8 alarm input
	Alarm output	1 alarm output
Connector	Serial interface	Support 1 RS485
	Network interface	RJ45, 10M/100M
VGA	VGA output	800x600, 1024x768, 1280 x1024, 1366 x768, 1440 x900
Software upgrade	Support USB firmware upgrade and remote upgrade by internet	
others	Voltage input	AC: 110-240V
	Power Consumption	6W without HDD
	Heat elimination way	By heat sink of high thermal conductivity and high performance cooling fan
	Working temperature	-10----50℃

### Basic Working Parameter:

Item	Parameter	Description
Voltage input	12V	DC 12V
Video impedance input	75Ω	75Ω each channel
Video output	1Vp-p	1Vp-p CVBS signal
SATA HDD	Two SATA with mainstream capability	
Working temperature	-10----50℃	Under normal conditions
I/O Port	0-2V	Low level warning
	5V-30V	High level warning
RS485	Pelco-D, Pelco-P	

### 性能参数:

项目	设备参数	规格说明
系统	操作语言	中文/英文/俄语/意大利语/葡萄牙语/罗马尼亚语
	图形用户界面	图形化菜单操作界面 (OSD菜单)
	密码安全	用户密码、管理员密码两级管理
视频	视频输入	8路复合视频输入 幅度1.0V p-p, 阻抗75Ω, BNC
	视频输出	单路视频输出 幅度1.0V p-p, 阻抗75Ω, BNC
	视频显示	8路: 一画面, 四画面, 九画面显示可切换
	视频标准	PAL制式, 25帧/秒, CCIR625线, 50场 NTSC制式, 30帧/秒, CCIR525线, 60场
音频	音频输入	8路音频输入, 阻抗600Ω, RCA
	音频输出	单路音频输出, 阻抗600Ω, RCA
	基本输出电平	线性电平
	录音方式	声音与视频同步录制
图像处理及存储	音频压缩	ADPCM
	图像压缩	H.264
	图像分辨率	CIF/HD1/D1可选 (支持2*D1+6*CIF)
	视频流标准	ISO14496-10
	音频流标准	ADPCM
	视频码率	CIF: 384, 512, 768 Kbps (标准的) 三档可调 HD1: 512, 768, 1024 Kbps (较高的) 三档可调 D1: 896, 1024, 1280Kbps (最高的) 三档可调
	音频码率	32KB/s
报警	数据存储器	支持主流容量的SATA HDD
通信接口	报警输入	8个报警输入
	报警输出	1个报警输出
USB	串行接口	支持1个RS485接口
	网络接口	RJ45, 10M/100M自适应网络接口
VGA	鼠标	USB1.1
	U盘	USB2.0
软件升级	VGA输出	支持800×600、1024×768、1280×1024、1366×768、1440×900五种分辨率。
	IE端远程浏览	通过有线网络实现视频预览、录像下载、参数配置等功能
其它	软件升级	本机支持U盘升级, 或者通过网络升级
	输入电压	AC:110-240V
	功耗	6W 不带硬盘与外设
	散热方式	配置高导热散热片及高性能风扇
	工作温度	-10----50℃

### 基本工作参数:

项目	工作参数	说明
输入电压	12V	直流 12V
视频输入阻抗	75Ω	每路视频输入阻抗均75Ω
视频输出	1Vp-p	输出一个1Vp-p CVBS模拟信号
硬盘SATA接口	两个SATA接口, 支持主流容量SATA硬盘	
工作温度	-10----50℃	指的是通风良好条件下的环境温度
I/O接口	0-2V	为低电平报警
	5V-30V	为高电平报警
RS485串口	接云台协议Pelco-D, Pelco-P	



## LS-9316H

## Product Features:

- H.264 compression
- Two USB interface, USB2.0 for data backup, USB1.1 for mouse operation
- Two 3.5" SATA HDD
- Special file system for security
- 16 bit color translucent user-friendly GUI, with notes for selected menu items
- Optimized 16 channel simultaneously playback
- Double level user management
- Support live view, parameter setting and copy playback video via network

## 产品特点:

- 视频压缩格式为标准H.264
- 两个USB接口, 一个USB2.0用于数据备份, 一个USB1.1用于鼠标操作
- 配置了两个3.5英寸硬盘的中型机箱
- 为了分段录像不产生碎片、数据保密性而在设备的硬盘中使用的是普通PC操作系统无法识别的特殊文件管理系统
- 16位真色半透明图形化菜单界面, 菜单选项注释提示
- 优化的十六路同步回放
- 两级用户权限管理
- 支持网络对本机多画面实时浏览, 参数设置, 拷贝或回放录像。



## Chief Parameter:

Item	Device Parameter	Specification
System	Language	English/ Chinese/ Russian/ Italian/ Portuguese/ Romanian
	GUI	Graphic menu (OSD Menu)
	password	user password, administrator password
Video	Video in	16ch composite video input 1.0Vp-p, impedance75Ω, BNC
	Video out	2ch composite video output, BNC
	Video display	16channel: 1/4/9/16 channel switch
	Video standard	PAL, 25f/s, CCIR625line, 50scene NTSC, 30f/s, CCIR525line, 60scene
Audio	Audio input	16ch audio input, impedance600Ω, RCA
	Audio output	1ch audio output, impedance600Ω, RCA
	Basic electricity output	Linearity electricity
	Record style	Audio video recorded simultaneously
	Audio compression	ADPCM
Picture proceeding and store	Picture compression	H.264
	Picture resolution	CIF
	Streaming style	ISO14496-10
	Audio style	ADPCM
	Video code rate (16CH)	CIF: 384~768 Kbps (normal) HD1: 512~1024Kbps (high) D1: 512~1024Kbps (highest)
	Audio code rate	32KB/s
	Data storage	SATA HDD storage (optional)
Alarm	Alarm input	16 alarm input
	Alarm output	1 alarm output
Connector	Serial interface	Support 1 RS485
	Serial interface	Support 1 RS232
	Network interface	RJ45, 10M/100M
VGA	VGA output	800x600, 1024x768, 1280 x1024, 1366 x768, 1440 x900
Software upgrade	Support USB firmware upgrade and remote upgrade by internet	
HDMI	HDMI output	Support 720P, 1080i, 1080P
others	Voltage input	AC: 110~240V
	Power Consumption	6W without HDD
	Heat elimination way	By heat sink of high thermal conductivity and high performance cooling fan
	Working temperature	-10---50℃

## Basic Working Parameter:

Item	Parameter	Description
Voltage input	12V	DC 12V
Video impedance input	75Ω	75Ω each channel
Video output	1Vp-p	1Vp-p CVBS signal
SATA HDD	Four SATA with mainstream capability	
Working temperature	-10---50℃	Under normal conditions
I/O Port	0~2V	Low level warning
	5V~30V	High level warning
RS485	Pelco-D, Pelco-P	

## 性能参数:

项目	设备参数	规格说明
系统	操作语言	中文/英文/俄语/意大利语/葡萄牙语/罗马尼亚语
	图形用户界面	图形化菜单操作界面 (OSD菜单)
	密码安全	用户密码、管理员密码两级管理
视频	视频输入	16路复合视频输入 幅度1.0V p-p, 阻抗75Ω, BNC
	视频输出	两路复合视频输出 幅度1.0V p-p, 阻抗75Ω, BNC
	视频显示	8路: 一画面, 四画面, 九画面, 十六画面显示可切换
	视频标准	PAL制式, 25帧/秒, CCIR625线, 50场 NTSC制式, 30帧/秒, CCIR525线, 60场
音频	音频输入	16路音频输入, 阻抗600Ω, RCA
	音频输出	单路音频输出, 阻抗600Ω, RCA
	基本输出电平	线性电平
	录音方式	声音与视频同步录制
图像处理及存储	图像压缩	H.264
	图像分辨率	CIF
	视频流标准	ISO14496-10
	音频流标准	ADPCM
	视频码率	CIF: 384, 512, 768 Kbps (标准的) 三档可调 HD1: 512, 768, 1024 Kbps (较高的) 三档可调 D1: 896, 1024, 1280Kbps (最高的) 三档可调
	音频码率	32KB/s
	数据存储	支持主流容量的SATA HDD
报警	报警输入	16个报警输入
	报警输出	1个报警输出
通信接口	串行接口	支持1个RS232接口
	串行接口	支持1个RS485接口
	网络接口	RJ45, 10M/100M自适应网络接口
USB	鼠标	USB1.1
	U盘	USB2.0
VGA	VGA输出	支持800×600、1024×768、1280×1024、1366×768、1440×900五种分辨率。
配套软件	IE端远程浏览	通过有线网络实现视频预览、录像下载、参数配置等功能
HDMI	高清视频输出	支持720P, 1080i, 1080P
软件升级	本机支持U盘升级, 或者通过网络升级	
其它	输入电压	AC: 110~240V
	功耗	6W 不带硬盘与外设
	散热方式	配置高导热散热片及两个高性能风扇
	工作温度	-10---50℃

## 基本工作参数:

项目	工作参数	说明
输入电压	12V	直流 12V。
视频输入阻抗	75Ω	每路视频输入阻抗均75Ω。
视频输出	1Vp-p	输出一个1Vp-p CVBS模拟信号。
硬盘SATA接口	四个SATA接口, 支持主流容量SATA硬盘	
工作温度	-10---50℃	指的是通风良好条件下的环境温度。
I/O接口	0~2V	为低电平报警。
	5V~30V	为高电平报警。
RS232串口	预留串口, 用于扩展RS232设备。	
RS485串口	接云台协议Pelco-D, Pelco-P	

**longse**<sup>®</sup>

# CCTV CAMERA & DVR KIT

摄像机&硬盘录像机套装



Choose Longse, Choose Security  
选择长视，选择安全

## 4 Channel DVR & Camera Kits (LS-9004H Series)

-  LS-9004HK5
-  LS-9004HK4
-  LS-9004HK3
-  LS-9004HK2
-  LS-9004HK1



Model No.	DVR	CCTV Camera
<b>LS-9004HK1</b>	1 x LS-9004H	4 x LICE24N
<b>LS-9004HK2</b>	1 x LS-9004H	4 x LIRDB
<b>LS-9004HK3</b>	1 x LS-9004H	4 x LICE48
<b>LS-9004HK4</b>	1 x LS-9004H	2 x LICE24N + 2 x LIRDB
<b>LS-9004HK5</b>	1 x LS-9004H	2 x LICE48 + 2 x LIRDB

### Color CCD Camera

Weatherproof IR Camera  
SONY/ SHARP Color CCD  
420/540TVL is optional  
Day & Night Function  
Auto White Balance(AWB)  
Back Light Compensation (BLC)  
Usable Illumination: 0Lux (Built In IR LED ON)  
PAL and NTSC system Optional  
Bracket Included

### Package Content

1 x H.264 4CH DVR (LS-9004H)  
4 x Color CCD Camera  
4 x 20m BNC Cables  
1 x 5 way Power Cable Splitter  
1 x USB Mouse  
1 x IR Controller  
1 x Power supply  
1 x User Manual and Warranty Card



### H.264 4CH Digital Video Recorder

Compression Method: H.264  
Video Input/Output: BNC 4CH In/ 1CH Out/ VGA 1CH Out  
Audio Input/Output: RCA 4CH In/ 1CH Out  
Alarm Input/Output: Alarm 4CH In/ 1CH Out  
Real time recording support:  
CIF:352 x 240 with 240 Fps (NTSC); 352 x 288 with 200 Fps (PAL)  
D1:720 x 480 with 120 Fps (NTSC); 704 x 576 with 100 Fps (PAL)  
Preview resolution: 720 x 480 (NTSC), 704 x 576 (PAL);  
Playback resolution: D1 x 4  
1 RJ-45 Ethernet connector, Static, Dynamic IP and DDNS  
Support Internet Explorer and special client software  
PTZ, RS485, USB Mouse, IR Controller  
Support remote view by Mobilephone  
Backup: USB2.0 and Network  
1 SATA Hard Disk interface

### H.264 四路硬盘录像机

压缩方式: H.264  
视频输入/输出: 4路BNC输入/1路BNC输出/1路VGA输出  
音频输入/输出: 4路RCA输入/1路RCA输出  
报警输入/输出: 4路报警输入/1路报警输出  
实时录像视频标准:  
PAL制式, 25帧/秒, CCIR625线, 50场  
NTSC制式, 30帧/秒, CCIR525线, 60场  
预览分辨率: 720x480(NTSC制), 704x576(PAL制)  
图像分辨率: CIF/HD1/D1可选 (支持2\*D1+6\*CIF)  
网络接口: RJ45, 10M/100M自适应网络接口  
通过有线网络实现视频预览、录像下载、参数配置等功能  
带云台功能, 标配鼠标及红外遥控器  
支持远程手机浏览  
备份方式: USB2.0及网络备份  
支持1个主流容量的SATA HDD

### 彩色CCD摄像机

红外防水功能  
Sony/ Sharp CCD可选  
420/540线可选  
自动彩色转黑白功能  
自动跟踪白平衡功能  
背光补偿功能  
可用照度: 0Lux (红外灯开启)  
PAL及NTSC制可选  
标配带支架

### 包装内容

1 x H.264 四路硬盘录像机 (LS-9004H)  
4 x 彩色CCD摄像机  
4 x 20米BNC同轴电缆线  
1 x 一分五电源线  
1 x USB鼠标  
1 x 红外遥控器  
1 x 电源  
1 x 使用说明书及保修卡



## 4 Channel DVR & Camera Kits (LS-9204H Series)

-  LS-9204HK5
-  LS-9204HK4
-  LS-9204HK3
-  LS-9204HK2
-  LS-9204HK1



Model No.	DVR	CCTV Camera
LS-9204HK1	1 x LS-9204H	4 x LICE24N
LS-9204HK2	1 x LS-9204H	4 x LIRDB
LS-9204HK3	1 x LS-9204H	4 x LICE48
LS-9204HK4	1 x LS-9204H	2 x LICE24N + 2 x LIRDB
LS-9204HK5	1 x LS-9204H	2 x LICE48 + 2 x LIRDB

### Color CCD Camera

Weatherproof IR Camera  
 SONY/ SHARP Color CCD  
 420/540TVL is optional  
 Day & Night Function  
 Auto White Balance(AWB)  
 Back Light Compensation (BLC)  
 Usable Illumination: 0Lux (Built In IR LED ON)  
 PAL and NTSC system Optional  
 Bracket Included

### Package Content

1 x H.264 4CH DVR (LS-9204H)  
 4 x Color CCD Camera  
 4 x 20m BNC Cables  
 1 x 5 way Power Cable Splitter  
 1 x USB Mouse  
 1 x IR Controller  
 1 x Power supply  
 1 x User Manual and Warranty Card



### H.264 4CH Digital Video Recorder

Compression Method: H.264  
 Video Input/Output: BNC 4CH In/ 1CH Out/ VGA 1CH Out  
 Audio Input/Output: RCA 4CH In/ 1CH Out  
 Alarm Input/Output: Alarm 4CH In/ 1CH Out  
 Real time recording support:  
 CIF:352 x 240 with 240 Fps (NTSC); 352 x 288 with 200 Fps (PAL)  
 D1:720 x 480 with 120 Fps (NTSC); 704 x 576 with 100 Fps (PAL)  
 Preview resolution: 720 x 480 (NTSC), 704 x 576 (PAL);  
 Playback resolution: D1 x 4  
 1 RJ-45 Ethernet connector, Static, Dynamic IP and DDNS  
 Support Internet Explorer and special client software  
 PTZ, RS485, USB Mouse, IR Controller  
 Support remote view by Mobilephone  
 Backup: USB2.0 and Network  
 2 SATA Hard Disk interface

### H.264 四路硬盘录像机

压缩方式: H.264  
 视频输入/输出: 4路BNC输入/1路BNC输出/1路VGA输出  
 音频输入/输出: 4路RCA输入/1路RCA输出  
 报警输入/输出: 4路报警输入/1路报警输出  
 实时录像视频标准:  
 PAL制式, 25帧/秒, CCIR625线, 50场  
 NTSC制式, 30帧/秒, CCIR525线, 60场  
 预览分辨率: 720x480(NTSC制), 704x576(PAL制)  
 图像分辨率: CIF/HD1/D1可选 (支持2\*D1+6\*CIF)  
 网络接口: RJ45, 10M/100M自适应网络接口  
 通过有线网络实现视频预览、录像下载、参数配置等功能  
 带云台功能, 标配鼠标及红外遥控器  
 支持远程手机浏览  
 备份方式: USB2.0及网络备份  
 支持2个主流容量的SATA HDD

### 彩色CCD摄像机






红外防水功能  
 Sony/ Sharp CCD可选  
 420/540线可选  
 自动彩色转黑白功能  
 自动跟踪白平衡功能  
 背光补偿功能  
 可用照度: 0Lux (红外灯开启)  
 PAL及NTSC制可选  
 标配带支架

### 包装内容

1 x H.264 四路硬盘录像机 (LS-9204H)  
 4 x 彩色CCD摄像机  
 4 x 20米BNC同轴电缆线  
 1 x 一分五电源线  
 1 x USB鼠标  
 1 x 红外遥控器  
 1 x 电源  
 1 x 使用说明书及保修卡



## 8 Channel DVR & Camera Kits (LS-9008H Series)

-  LS-9008HK5
-  LS-9008HK5
-  LS-9008HK5
-  LS-9008HK5
-  LS-9008HK5



Model No.	DVR	CCTV Camera
LS-9008HK1	1 x LS-9008H	8x LICE24N
LS-9008HK2	1 x LS-9008H	8 x LIRDB
LS-9008HK3	1 x LS-9008H	8 x LICE48
LS-9008HK4	1 x LS-9008H	4 x LICE24N + 4 x LIRDB
LS-9008HK5	1 x LS-9008H	4 x LICE48 + 4 x LIRDB

### Color CCD Camera

Weatherproof IR Camera  
SONY/ SHARP Color CCD  
420/540TVL is optional  
Day & Night Function  
Auto White Balance(AWB)  
Back Light Compensation (BLC)  
Usable Illumination: 0Lux (Built In IR LED ON)  
PAL and NTSC system Optional  
Bracket Included

### Package Content

1 x H.264 4CH DVR (LS-9008H)  
8 x Color CCD Camera  
8 x 20m BNC Cables  
1 x 8 way Power Cable Splitter  
1 x USB Mouse  
1 x IR Controller  
1 x Power supply  
1 x User Manual and Warranty Card



### H.264 8CH Digital Video Recorder

Compression Method: H.264  
Video Input/Output: BNC 8CH In/ 1CH Out/ VGA 1CH Out  
Audio Input/Output: RCA 8CH In/ 1CH Out  
Alarm Input/Output: Alarm 4CH In/ 1CH Out  
Real time recording support:  
CIF:352 x 240 with 240 Fps (NTSC); 352 x 288 with 200 Fps (PAL)  
D1:720 x 480 with 120 Fps (NTSC); 704 x 576 with 100 Fps (PAL)  
Preview resolution: 720 x 480 (NTSC), 704 x 576 (PAL);  
Playback resolution: CIF x 8 / D1 x 1  
1 RJ-45 Ethernet connector, Static, Dynamic IP and DDNS  
Support Internet Explorer and special client software  
PTZ, RS485, USB Mouse, IR Controller  
Support remote view by Mobilephone  
Backup: USB2.0 and Network  
1 SATA Hard Disk interface

### H.264 八路硬盘录像机

压缩方式: H.264  
视频输入/输出: 8路BNC输入/1路BNC输出/1路VGA输出  
音频输入/输出: 8路RCA输入/1路RCA输出  
报警输入/输出: 4路报警输入/1路报警输出  
实时录像视频标准:  
PAL制式, 25帧/秒, CCIR625线, 50场  
NTSC制式, 30帧/秒, CCIR525线, 60场  
预览分辨率: 720x480(NTSC制), 704x576(PAL制)  
图像分辨率: CIF/HD1/D1可选 (支持2\*D1+6\*CIF)  
网络接口: RJ45, 10M/100M自适应网络接口  
通过有线网络实现视频预览、录像下载、参数配置等功能  
带云台功能, 标配鼠标及红外遥控器  
支持远程手机浏览  
备份方式: USB2.0及网络备份  
支持1个主流容量的SATA HDD

### 彩色CCD摄像机






红外防水功能  
Sony/ Sharp CCD可选  
420/540线可选  
自动彩色转黑白功能  
自动跟踪白平衡功能  
背光补偿功能  
可用照度: 0Lux (红外灯开启)  
PAL及NTSC制可选  
标配带支架

### 包装内容

1 x H.264 八路硬盘录像机 (LS-9008H)  
8 x 彩色CCD摄像机  
8 x 20米BNC同轴电缆线  
1 x 一分八电源线  
1 x USB鼠标  
1 x 红外遥控器  
1 x 电源  
1 x 使用说明书及保修卡



## 8 Channel DVR & Camera Kits (LS-9208H Series)

-  LS-9008HK5
-  LS-9008HK5
-  LS-9008HK5
-  LS-9008HK5
-  LS-9008HK5



Model No.	DVR	CCTV Camera
LS-9208HK1	1 x LS-9208H	8x LICE24N
LS-9208HK2	1 x LS-9208H	8 x LIRDB
LS-9208HK3	1 x LS-9208H	8 x LICE48
LS-9208HK4	1 x LS-9208H	4 x LICE24N + 4 x LIRDB
LS-9208HK5	1 x LS-9208H	4 x LICE48 + 4 x LIRDB

### Color CCD Camera

Weatherproof IR Camera  
 SONY/ SHARP Color CCD  
 420/540TVL is optional  
 Day & Night Function  
 Auto White Balance(AWB)  
 Back Light Compensation (BLC)  
 Usable Illumination: 0Lux (Built In IR LED ON)  
 PAL and NTSC system Optional  
 Bracket Included

### Package Content

- 1 x H.264 4CH DVR (LS-9208H)
- 8 x Color CCD Camera
- 8 x 20m BNC Cables
- 1 x 8 way Power Cable Splitter
- 1 x USB Mouse
- 1 x IR Controller
- 1 x Power supply
- 1 x User Manual and Warranty Card



### H.264 8CH Digital Video Recorder

Compression Method: H.264  
 Video Input/Output: BNC 8CH In/ 1CH Out/ VGA 1CH Out  
 Audio Input/Output: RCA 8CH In/ 1CH Out  
 Alarm Input/Output: Alarm 4CH In/ 1CH Out  
 Real time recording support:  
 CIF:352 x 240 with 240 Fps (NTSC); 352 x 288 with 200 Fps (PAL)  
 D1:720 x 480 with 120 Fps (NTSC); 704 x 576 with 100 Fps (PAL)  
 Preview resolution: 720 x 480 (NTSC) , 704 x 576 (PAL);  
 Playback resolution: CIF x 8 / D1 x 1  
 1 RJ-45 Ethernet connector, Static, Dynamic IP and DDNS  
 Support Internet Explorer and special client software  
 PTZ, RS485, USB Mouse, IR Controller  
 Support remote view by Mobilephone  
 Backup: USB2.0 and Network  
 2 SATA Hard Disk interface

### H.264 八路硬盘录像机

压缩方式: H.264  
 视频输入/输出: 8路BNC输入/1路BNC输出/1路VGA输出  
 音频输入/输出: 8路RCA输入/1路RCA输出  
 报警输入/输出: 4路报警输入/1路报警输出  
 实时录像视频标准:  
 PAL制式, 25帧/秒, CCIR625线, 50场  
 NTSC制式, 30帧/秒, CCIR525线, 60场  
 预览分辨率: 720x480(NTSC制), 704x576(PAL制)  
 图像分辨率: CIF/HD1/D1可选 (支持2\*D1+6\*CIF)  
 网络接口: RJ45, 10M/100M自适应网络接口  
 通过有线网络实现视频预览、录像下载、参数配置等功能  
 带云台功能, 标配鼠标及红外遥控器  
 支持远程手机浏览  
 备份方式: USB2.0及网络备份  
 支持2个主流容量的SATA HDD

### 彩色CCD摄像机

红外防水功能  
 Sony/ Sharp CCD可选  
 420/540线可选  
 自动彩色转黑白功能  
 自动跟踪白平衡功能  
 背光补偿功能  
 可用照度: 0Lux (红外灯开启)  
 PAL及NTSC制可选  
 标配带支架

### 包装内容

- 1 x H.264 八路硬盘录像机 (LS-9208H)
- 8 x 彩色CCD摄像机
- 8 x 20米BNC同轴电缆线
- 1 x 一分八电源线
- 1 x USB鼠标
- 1 x 红外遥控器
- 1 x 电源
- 1 x 使用说明书及保修卡

